

Flush Pendent Sprinkler

(Fusible Link Type)

Standard Orifice Conventional Sprinkler

Standard Response



PRODUCT DESCRIPTION

All Protector sprinkler are manufactured using the time proven Belleville seal used exclusively by all major manufacturers to ensure long life and safe operation.

TECHNICAL SPECIFICATION

SIN: FS 01

Style: Flush Pendent Sprinkler

Norminal Orifice Size: 1/2" (12.7mm)/

K-Factor: 5.6 Imp. (80 S.I.)

Norminal Thread Size: 1/2" PT(15mm)

Max. Working Pressure : 175PSI


Factory Hydrostatic Test: 100% @500 PSI

Min. Operating Pressure : 7 PSI

Temperature Rating : 72°C

Coverage: R2.3

DISCHARGE CURVE

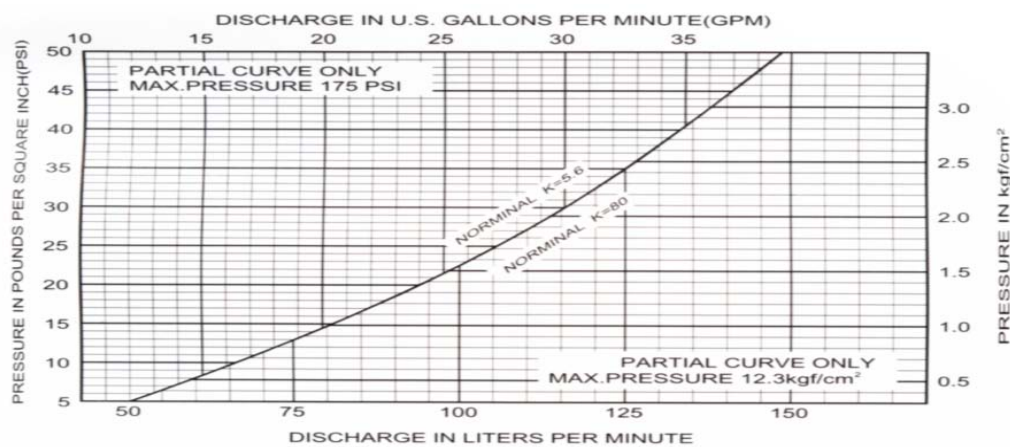

PROTECTOR SPRINKLER
An ISO 9001 certified company